

Cargo Control 311-332

Chains 312-316
 Chain Attachments. 312-313
 Binders 314
 Hooks 315
 Latch Kits 315-316
Interior. 316-321
 Beams. 316-317
 Load Bars 318
 Tie Downs 319-321
 Track 321
Straps & Winches 322-331
 Ratchet Straps 322-323
 Series A / E Logistic Straps 323
 Winch Straps. 323-326
 Accessories. 326-327
 Rubber Tarp Straps 328
 Winches 329-331
Tank Parts 332



Cargo Control

Chains

Transport Chain

	Size	Length	Grade
CRG-TC382070	3/8 in.	20 ft.	70



Binder Chain Assembly

	Size	Length	Grade	Load Limit	Additional
CMK638294	3/8 in.	20 ft.	70	6,600 lbs.	
CMKS941150	1/2 in.	30 links	80	12,000 lbs.	
CMK607062	3/8 in.		80	18,100 lbs.	Chain Only



(CMK638294)



(CMKS941150)



(CMK607062)

CMCO

Precut Chain with Grab Hooks

	Size	Length	Grade	Load Limit
KIN10034-20BX	5/16 in.	20 ft.	70	4,700 lbs.
KIN10034-25BX	5/16 in.	25 ft.	70	4,700 lbs.
KIN10038-20BX	3/8 in.	20 ft.	70	6,600 lbs.
KIN10038-25BX	3/8 in.	25 ft.	70	6,600 lbs.



(KIN10034-20BX)



(KIN10034-25BX)



(KIN10038-20BX)



(KIN10038-25BX)

Kinedyne

Chain Attachments

HammerLock Coupling Link

	Size	Grade	Working Load
CMK664062-2	5/8 in.	80	18,100 lbs.
CMK664050-2	1/2 in.	80	12,000 lbs.



(CMK664062-2)



(CMK664250)

CMCO

Replacement Pin

- CMKR664062-2
- CMKR664050-2

CRG

Chains



Chain Attachments

**Shackle Anchor
CMKM651AG**



Body Size: 5/8 in.
Screw Pin: 3/4 in.

CMCO


**Twin Clevis Link
WAB21700260**



Chain Size: 1/2 in.
Clevis: 5/8 in.

Wabash

**U Bolt
WABFST00180**

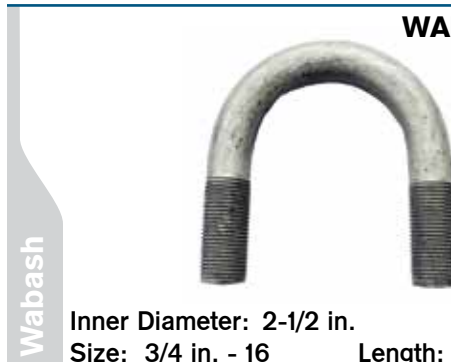

Inner Diameter: 2-1/2 in.
Size: 3/4 in. - 16 **Length:** 4 in.

Wabash

CRG

Chains

More Information

Typical Uses for Graded Chain

Grade 30: General-Purpose chain for industrial and agricultural applications including guard rails and load securement. This should not be used for overhead lifting.

Grade 43: Container securement and towing are typical uses for grade 43 chain. Do not use for overhead lifting.

Grade 70: Higher strength and heat treated, typically used in heavy duty trucking for load securement and towing.

Grade 80: The primary use is as a sling component for overhead lifting but can be used in rigging and tie-down applications.

Grade 100: 25% Stronger than grade 80, grade 100 is used as a sling component for overhead lifting. It can also be used for any application that a lower grade is used for.




Cargo Control



Binders

Lever Load

Chain Size	Grade	
5/16 in.	70	DIX48305
3/8 in.	43	
3/8 in.	30	

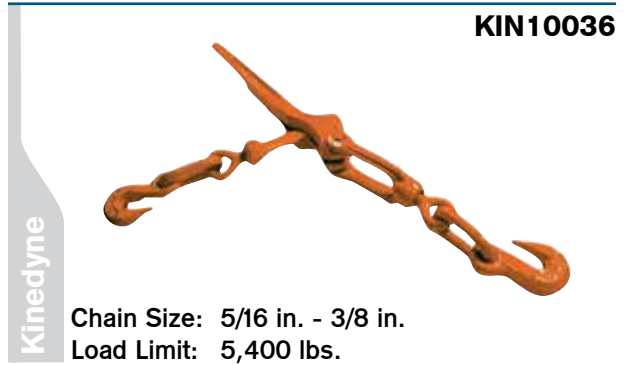

Ratchet Load

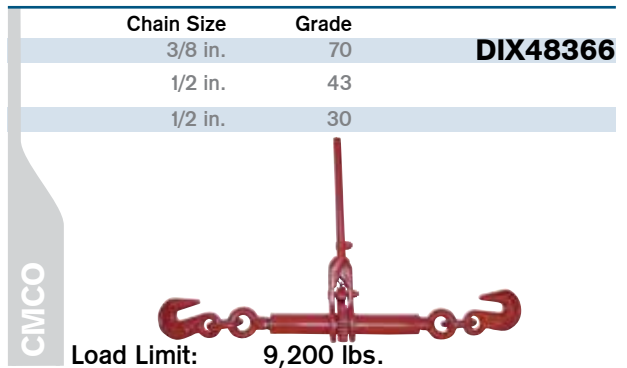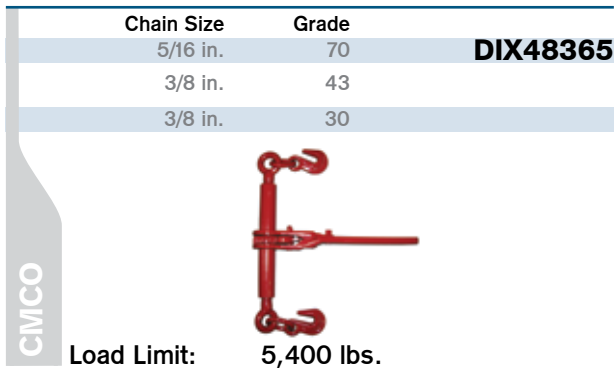

	Chain Size	Load Limit
KIN10035	5/16 in. - 3/8 in.	5,400 lbs.
KIN10035HD	3/8 in. - 1/2 in.	9,200 lbs.
KIN10035MD	5/16 in. - 3/8 in.	6,600 lbs.



Kinedyne

CRG

Chains

CIMCO
COLUMBUS MCGONNON
The Chain Control People

KINEDYNE
The Chain Control People

Chains

Hooks

Clevis Grab Hook

Grade	Chain Size	Load Limit	
70	5/16 in.	4,700 lbs.	DIX62273
70	3/8 in.	6,600 lbs.	DIX62373



CMCO

G70 Clevis

Sling Latch Hook

CMKM6507A



CMCO

Color: Orange
Chain Size: 5/8 in.
Work Load Limit:
10,000 lbs.

Accessories

Latch Kit
CMK4X1307

Sling Latch Hook

CMK657721



CMCO

Color: Orange
Grade: 100
Chain Size: 5/8 in.
Work Load Limit:
22,600 lbs.

Accessories

Latch Kit
CMK4X455329

Grab Hook

Grade	Size	Load Limit	
70	5/16 in.	4,700 lbs.	KIN10034GH
70	3/8 in.	6,600 lbs.	KIN10038GH



Kinedyne

Material: Alloy Steel Forged
Finish: Zinc Plated

CRG
Chains

Latch Kits

AWR1096609



For Crosby Safety Hook 1025893

CMK4X1307



CMCO

Zinc
Working Load: A- 5 ton, C- 3 ton

CMK4X1309



CMCO

Zinc
Working Load: A- 7 ton, C- 5 ton

CMK4X410



CMCO

Stainless Steel
Working Load: A- 5 ton, C- 3 ton

Cargo Control

Latch Kits

CMK4X412



CMCO

Stainless Steel
Working Load: A- 7 ton, C- 5 ton

CMK4X414



CMCO

For: M414

CMK4X455329



CMCO

For: 5/8 in. CE Hook

CMK595529



CMCO

Zinc Grade: 100 Chain: 5/8 in.

WAB2170039



Wabash

Beams

**Series E
or A Aluminum Beam**

Length	Part Number
84-39/64 in to 95 in.	KINFE8066-1
96-13/64 in. to 102-19/64 in.	KINFE8066-3



Kinedyne

Working Load: H-2200, V-2000
Standard Extruded Aluminum

Single Row Flanged K1 Track

Length	Part Number
72 in.	KIN2051-072



Kinedyne

Used with logistic straps
& standard E beams
Alternating A slot & beam
locking slots

Accessories

Bracket End Clip
KIN2043

CRG

Interior

CMCO
COLLIERIE MACHINERY

WABASH

KINEDYNE
The Cargo Control People

Beams

Series F Track

Length
120 in.

KIN2005



Kinedyne

Material: Galvanized Steel

CRG

Interior

Beams Accessories

**Standard Beam Socket
KIN1845**



Kinedyne

For: 2x4 or 2x6 lumber

**Attaching Pin
KINFE7053-1**



Kinedyne

Attaches Beam Head to Beam

**Head Unit
KIN80007**



Kinedyne

Replacement Head for 8000 & 8066 Beams
Replaces#: FE7955-8


**Track Fitting Ring
KINFE8264-1**



Kinedyne

Load Limit: 2,000 lbs.
Size: 1 in.

**Series A or E Track Fitting
KIN660001**

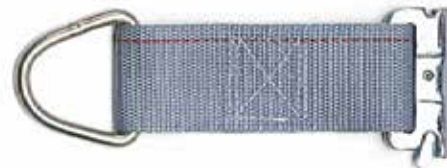

Kinedyne

Fitting: FE8306-1
Load Limit: 1,000 lbs.
Size: 2 in. x 6 in.

Includes: O-Ring
Material: Webbing

Cargo Control

Load Bars

Saf-T-Lok Bars

	Size	Material
KIN10085	90 in. to 105 in.	Steel
KIN10088	90 in. to 105 in.	Aluminum
KIN10085XL	97 in. to 113 in.	Steel



Kinedyne

Steel Saf-T-Lok Bar KIN10081



Constructed of heavy wall galvanized steel tubing for increased strength and durability. Ideal for shoring applications that require a greater area of cargo constraint.

Square One-Piece Jack Bars

Length	
86 in. to 104 in.	KINJB101
86 in. to 114 in.	KINJB101XL



Constructed of square steel tubing
Material: Galvanized Steel

Saf-T-Lok Bolt-On Foot

Type	
Large Tube	KIN10052
Small Tube	KIN10053



Molded pivoting rubber feet grip firmly to trailer walls, yet won't scuff & will remain pliable even at low temperatures

Cargo Bar Holder KIN10062



Designed to provide storage for various styles of load bars on the exterior of the cab. Black powder coated with a neoprene cushion to reduce vibration. Lockable, Capacity: 2

CRG

Interior

Kinedyne

Kinedyne

Kinedyne

Kinedyne



Tie Downs

Lock Rite Tie Down
BBTP7160-0030-001



Transcraft

Style: J Hook

Chain Tie Down

Load Limit	Chain Size	Type	
5,000 lbs.	3/8 in.	Standard	KIN10421
6,000 lbs.	3/8 in.	Heavy Duty	KIN10423

Kinedyne



Includes: 3 in. Bracket


Tie Down Chain Kit
TSCPZE-098M



Transcraft

Material: Aluminum
Type: 4 Hole Mount

Chain Tie Down
TSCPZE-387

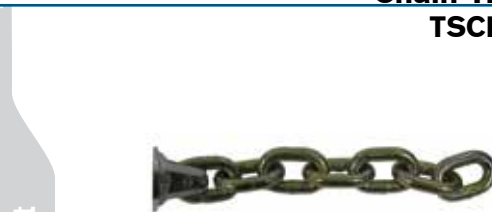

Transcraft

D-Ring Kit
CAR36-402



Cargotrol


D-Ring Clip
CAR36-402-2



Cargotrol

For CAR36-402

D Ring With Clip
WABA1300003

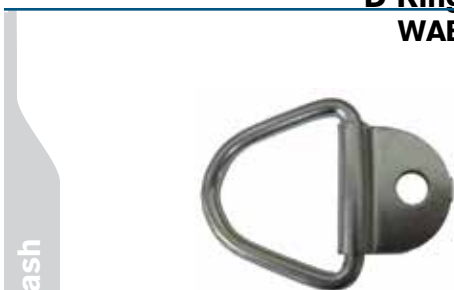

Wabash

D-Ring Assembly
FLT982-00274



Fleet Engineers

Size: 1 in.
Type: Weld On
(982-00243 QTY 1. 982-00221 QTY 1)

CRG

Interior



Cargo Control

Tie Downs

D Ring Kit
FRUFCB8819-900



Size: 5 in. x 6 in.
Type: Weld On

Fruehauf

D-Ring Assembly
FLT982-00270



Size: 1/2 in.
Type: Weld On

Fleet Engineers

D Ring Assembly
FLT982-00046



Work Load Limit: 6,000 lbs.
Size: 4-3/4 in. x 4-1/4 in. Ring: 3 in.

Fleet Engineers

D Ring
FRUFCB8819-1



Work Load Limit: 15,000 lbs.
Size: 5 in. x 6 in. Break: 47,000 lbs.

Fruehauf

D Ring Clip
FRUFCB8820-1



Size: 2-1/2 in.

Fruehauf

Recessed D-Ring
CAR36-800



For FRP Trailer

Cargotrol

Recessed D Ring
WABA1000707



Material: Aluminum
For: Plate Trailer

Wabash

New Style D Ring Assembly
WABA1001193



One Piece
Exterior: White

Wabash

CRG

Interior

FRUEHAUF

FLEET ENGINEERS

WABASH

Int. Cargo

Tie Downs

Recess D Ring
WABA1300028



Wabash

Material: Aluminum
Size: 3-1/2 in.

Outer Pan Cover
WABA1A00180



Wabash

Color: White

Lashing Hook
FRUXCB9693-PK1



Fruehauf

Size: 2 in.
Material: Steel

Pallet Stop
PROANGLE1



Pro-Par

Track

Logistic Track
KIN2019



Kinedyne

Material: 50,000 PSI Steel
Length: 10 ft. x 3-15/32 in.
Type: E-Slot Vertical
Color: Gray

Logistic Track


Material
Galvanized **KIN43001**
Gray **KIN43002**



Kinedyne

Material: 12 Gauge 50,000 PSI Steel
Length: 10 ft. x 5 in.
Type: E-Slot Horizontal

Logistic Track
KIN43001-624



Kinedyne

Material: 12 Gauge 50,000 PSI Steel
Color: Galvanized
Length: 52 ft. x 5 in.
Type: E-Slot Horizontal

End Cap
KIN8730



Kinedyne

Horizontal A or E Track
Material: Plastic
Length: 47/64 in. x 5-11/64 in.

CRG

Straps & Winches



Cargo Control

Straps

Ratchet

	Type	Length	Width	End	Color	Work Load Limit
ACR48672-14	Series E	16 ft.	2 in.	Series E/A	Gray	1,333 lbs.



Ancra

	Type	Length	Width	End	Color	Work Load Limit
CRG-5030FH-Y		30 ft.	2 in.	Flat Hook	Yellow	



	Type	Length	Width	End	Color	Work Load Limit
KIN512720	Wide Handle	27 ft.	2 in.	Flat Hook	Yellow	3,335 lbs.
KIN513020	Wide Handle	30 ft.	2 in.	Flat Hook	Yellow	3,335 lbs.
KIN512784	Wide Handle	27 ft.	2 in.	Wire Hook	Yellow	3,335 lbs.
KIN513084	Wide Handle	30 ft.	2 in.	Wire Hook	Yellow	3,335 lbs.
KIN573020	Large Wide Handle	30 ft.	2 in.	Flat Hook	Yellow	3,335 lbs.
KIN593021	Large Handle	30 ft.	4 in.	Flat Hook	Yellow	5,400 lbs.
KIN641201	Series E	12 ft.	2 in.	Series E/A	Gold	1,000 lbs.
KIN641601	Series E	16 ft.	2 in.	Series E/A	Gray	1,000 lbs.
KIN642001	Series E	20 ft.	2 in.	Series E/A	Blue	1,000 lbs.
KIN711587PK	Utility Strap	15 ft.	1 in.	Vinyl Coated S Hooks	Blue	400 lbs.
KIN711681-45PK	Utility Strap	16 ft.	1 in.	Wire Hook & D-Ring	Blue	835 lbs.



(KIN512720/
KIN513020)




(KIN512784/
KIN513084)



(KIN573020)



(KIN593021)




(KIN641201)



(KIN641601)



(KIN642001)



(KIN711587PK)



(KIN711681-45PK)

Kinedyne

CRG

Straps & Winches



Straps

Ratchet

	Type	Length	Width	End	Color
PROCC-STRAP8	Wide Handle	30 ft.	2 in.	Flat Hook	Yellow
PROCC-STRAP9	Wide Handle	27 ft.	2 in.	Flat Hook	Yellow
PROCC-STRAP10	Wide Handle	27 ft.	2 in.	Wire Hook	Yellow
PROCC-STRAP4	Series E	12 ft.	2 in.	Series E/A	Yellow
PROCC-STRAP3	Series E	16 ft.	2 in.	Series E/A	Yellow



(PROCC-STRAP8)



(PROCC-STRAP9)



(PROCC-STRAP10)



(PROCC-STRAP4)



(PROCC-STRAP3)

Pro-Par

Series A or E Logistic

	Type	Length	Width	End	Color	Work Load Limit
KIN651201	Cam Buckle	12 ft.	2 in.	Series E/A	Gold	835 lbs.
KIN651601	Cam Buckle	16 ft.	2 in.	Series E/A	Black	835 lbs.
KIN652001	Cam Buckle	20 ft.	2 in.	Series E/A	Blue	835 lbs.



(KIN651601)



(KIN651201)



(KIN652001)

Kinedyne

	Type	Length	Width	End	Color
PROCC-STRAP6	Cam Buckle	16 ft.	2 in.	Series E/A	Yellow
PROCC-STRAP7	Cam Buckle	12 ft.	2 in.	Series E/A	Yellow
PROCC-STRAP12	Hook	16 ft.	2 in.		Yellow



(PROCC-STRAP6)



(PROCC-STRAP7)



(PROCC-STRAP12)

Pro-Par

Winch

	Length	Width	End	Color	Work Load Limit
ACR43795-10-30	30 ft.	4 in.	Flat Hook	Yellow	5,400 lbs.
ACR43795-15-30	30 ft.	4 in.	Chain Anchor	Yellow	3,333 lbs.



(ACR43795-10-30)



(ACR43795-15-30)

Ankra

CRG

Straps & Winches



Cargo Control

Straps

Winch

	Length	Width	End	Color	Work Load Limit
KIN422721	27 ft.	4 in.	Flat Hook	Yellow	5,400 lbs.
KIN423021	30 ft.	4 in.	Flat Hook	Yellow	5,400 lbs.
KIN423021STENWUSA	30 ft.	4 in.	Flat Hook	Yellow	5,400 lbs.
KIN423521	35 ft.	4 in.	Flat Hook	Yellow	5,400 lbs.
KIN424021	40 ft.	4 in.	Flat Hook	Yellow	5,400 lbs.
KIN423010	30 ft.	4 in.	Delta Ring	Yellow	5,400 lbs.
KIN423021E	30 ft.	4 in.	Flat Hook	Blue	5,400 lbs.
KIN423030	30 ft.	4 in.	Sewn Loop	Yellow	5,000 lbs.
KIN423040	30 ft.	4 in.	Chain Anchor	Yellow	5,400 lbs.
KIN4630D3	30 ft.	4 in.	Flat Hook	Gray	5,400 lbs.



Kinedyne

Application Chart

Tie-Down Calculation Chart

Strap Size	Work Load Limit	Load									
		5,000 lbs.	10,000 lbs.	15,000 lbs.	20,000 lbs.	25,000 lbs.	30,000 lbs.	35,000 lbs.	40,000 lbs.	45,000 lbs.	50,000 lbs.
2 in.	3,000 lbs.	1	2	3	4	5	5	6	7	8	9
	3,335 lbs.	1	2	3	3	4	5	6	6	7	8
3 in.	4,000 lbs.	1	2	2	3	4	4	5	5	6	7
	5,000 lbs.	1	2	2	2	3	3	4	4	5	5
4 in.	5,000 lbs.	1	2	2	2	3	3	4	4	5	5
3 in. or 4 in.	5,400 lbs.	1	1	2	2	3	3	4	4	5	5

$$\frac{\text{Working Load Limit}}{(\text{Load} \div 2)} = \text{Number of Straps}$$

(Round Up Use Whole Numbers)

Working Load Limit:
Tie downs used to secure an article against movement in any direction, must be at least 1/2 the weight of the article in working load limit.

Additional tie-down assemblies may be required to meet other industry, local, state and federal regulations. **Warning: Do not exceed Working Load Limits.**

CRG

Straps & Winches



NEW PRODUCTS

KINEDYNE
The Cargo Control People!™

50
CELEBRATING 50 YEARS
OF CARGO CONTROL
EXCELLENCE

Good, Better, Best, Superior to the Rest

Now you have Three Levels of Strength and Durability to Choose From!



The Kinedyne Gold Standard



The New K-FORCE™



The Improved RHINO MAX™

Engineered by Kinedyne	✘	✘	✘
Built by Kinedyne	✘	✘	✘
Marked and Rated in accordance to North American Regulations	✘	✘	✘
Engineered Sew Pattern	✘	✘	✘
Working Load Limit Stenciled on the strap	✘	✘	✘
Tyvek Working Load Limit Tag	✘	✘	✘
WSTDA Webbing Capacity Indicator	✘	✘	✘
6670 Lbs. Working Load Limit - 4" Winch Straps		✘	✘
4000 Lbs. Working Load Limit - 2" Ratchet Straps		✘	✘
1500 Lbs. Working Load Limit - Logistic Straps		✘	
Manufactured using Heavy Duty Fittings		✘	✘
Manufactured using Heavy Duty Webbing		✘	✘
Manufactured Using anti-abrasion Rhino-skin coating			✘



Cargo Control

Straps

Winch

	Length	Width	End	Color	Work Load Limit
PROCC-STRAP1	30 ft.	4 in.	Flat Hook	Yellow	
PROCC-STRAP2	27 ft.	4 in.	Flat Hook	Yellow	



Pro-Par

Strap Accessories

**Corner Protector
KIN1863**



Material: Steel
For Use With: 1-3/4 in. - 2 in. Web
Cable or Chain

**Corner Protector
CRG-SCP**



Material: Steel

**Corner Protector
KIN37025**



Material: Plastic
For Use With: 2 in. - 4 in. Web

**Corner Protector
CRG-CPP24BLUE**



Material: Plastic
Color: Blue

**Corner Protector
KIN37026**



Material: Plastic, 12 in.
For Use With: 2 in. - 4 in. Web / Chain

**Vee Boards®
KINVB13**



Size: 8 in. x 8 in. x 11 in.
Slots: (2) 4-1/2 in.

CRG

Straps & Winches



Strap Accessories

Web Protector
KIN37024



Kinedyne

Size: 4 in.
Material: Rubber

Web Protector
CRG-RCP4



Color: Black
Material: Rubber

Standard Handle Ratchet
KIN802



Kinedyne

Work Load Limit: 3,670 lbs.
2 in. Handle

Wide Handle Ratchet Buckles
KIN804



Kinedyne

Work Load Limit: 3,670 lbs.
2 in. Wide Handle

Standard Strap Winder
KIN10094



Kinedyne

All steel construction with zinc plating. Easily clamp to trailer side rail.
Compatible with 2 in. - 4 in. Straps

Premium Strap Winder
KIN10091



Kinedyne

All steel construction with zinc plating. Easily fitted to trailer side rail and can be wound in either direction.
Compatible with 2 in. - 4 in. Straps

Kwik Winder
KIN10092



Kinedyne

Allows drivers to wind straps onto the mandrel of the winch in a fraction of the time it takes to do it by hand.

StrapPak
KIN15602



Kinedyne

Compatible with 2 in. ratchet strap

CRG

Straps & Winches



Cargo Control

Rubber Tarp Straps

	Description	Material	Type	Length
RUB80154	Economy	EPDM	Silver Line	15 in.
RUB80214	Economy	EPDM	Silver Line	21 in.
RUB80314	Economy	EPDM	Silver Line	31 in.
RUB197940	Heavy Duty	EPDM	Gold Line	10 in.
RUB197840	Heavy Duty	EPDM	Gold Line	15 in.
RUB196940	Heavy Duty	EPDM	Gold Line	21 in.
RUB197740	Heavy Duty	EPDM	Gold Line	31 in.
RUB738940	Heavy Duty	EPDM	Gold Line	41 in.



Economy

	Description	Type	Length
PROTS10NR	Natural Rubber	Extreme Cold	10 in.
PROTS15NR	Natural Rubber	Extreme Cold	15 in.
PROTS21NR	Natural Rubber	Extreme Cold	21 in.
PROTS31NR	Natural Rubber	Extreme Cold	31 in.
PROTS41NR	Natural Rubber	Extreme Cold	41 in.
PROTS10EPDM	EPDM Rubber	Heat Resistance	10 in.
PROTS15EPDM	EPDM Rubber	Heat Resistance	15 in.
PROTS21EPDM	EPDM Rubber	Heat Resistance	21 in.
PROTS31EPDM	EPDM Rubber	Heat Resistance	31 in.
PROTS41EPDM	EPDM Rubber	Heat Resistance	41 in.



Pro-Par

Crimped Trap Strap CRG-RT21CRB



Length: 21 in. Qty: Box of 50
Material: Natural Rubber


S-Hook RUB2.5



Size: 2-1/2 in.

Tech Tip

Identification & Maintenance

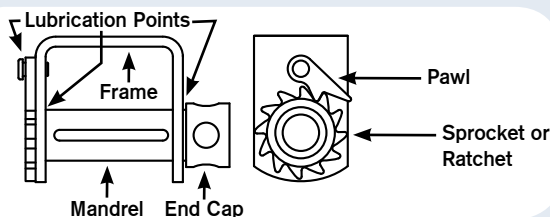

Maintenance

Dirt, mud, road salt and ice should be cleaned from winches. Regular lubrication ensures that the winch pawl will drop freely into the sprocket teeth and sprocket will rotate freely.

Damaged or non-operation winches need to be replaced. Portable winches should be cleaned & stored in a dry location.

CRG

Straps & Winches



Winches

	Type	Overall Length	Spool Width	Frame Height	Frame Depth
ACR49207-137	Slider Double L Track	7-1/2 in.	4-19/32 in.	6 in.	4 in.
ACR49706-10	Wilson Style	7-7/8 in.	4-7/8 in.	6-1/2 in.	4 in.
ACR49716-10	Standard Outward Off-set	8-27/64 in.	4-23/32 in.	4-5/8 in.	3-5/32 in.
ACR49246-10-BP	Standard / Sliding				



(ACR49207-137)



(ACR49706-10)



(ACR49716-10)



(ACR49246-10-BP)

Ancra

Ratcheting Cap ACR49723-10



Ancra

Converts any winch to a ratcheting winch. Simple bolt-on design.

SilverCap® OverDrive™

STD Winch LUF7088155



Lufkin

For Lufkin Only

	Type	Overall Length	Inside Frame	Overall Height	Frame Width
KIN1820P2	Standard Portable / Clamp-On	7-3/4 in.	4-7/8 in.	5-1/2 in.	3-1/2 in.
KIN1820	Standard / Weld-On	7-21/32 in.	4-7/8 in.	5-33/64 in.	3-35/64 in.
KIN3820	Standard / Sliding	7-21/32 in.	4-7/8 in.	5-63/64 in.	3-15/16 in.
KIN7820P2	Low Profile Portable / Clamp-On	7-3/4 in.	4-7/8 in.	4-3/8 in.	4 in.
KIN7820	Low Profile / Weld-On	7-11/16 in.	4-7/8 in.	4-21/64 in.	3-15/16 in.
KIN5820	Storable / Sliding	7-11/16 in.	4-7/8 in.	7-23/32 in.	3-15/16 in.
KIN1020	Standard Double "L" / Sliding	7-23/32 in.	4-7/8 in.	5-7/8 in.	3-15/16 in.
KIN1020LP	Low Profile Double "L" / Sliding	7-23/32 in.	4-7/8 in.	5-1/4 in.	3-15/16 in.
KIN1022	Double "L" Sliding	7-23/32 in.	4-7/8 in.	5-1/4 in.	3-15/16 in.
KIN13008	Standard / Weld-On	7-3/4 in.	4-7/8 in.	6-1/2 in.	3-35/64 in.



(KIN1820P2)



(KIN1820)



(KIN3820)



(KIN7820P2)



(KIN7820)



(KIN5820)



(KIN1020)



(KIN1020LP)



(KIN1022)



(KIN13008)

Kinedyne

Cargo Control

Winches

	Type	Overall Length	Inside Frame	Overall Height	Frame Width
PROCC-WINCH1	Standard / Sliding	7-21/32 in.	4-7/8 in.	5-63/64 in.	3-15/16 in.
PROCC-WINCH2	Standard Double "L" / Sliding	7-23/32 in.	4-7/8 in.	5-7/8 in.	3-15/16 in.
PROCC-WINCH3	High Profile / Sliding	7-11/16 in.	4-7/8 in.	7-23/32 in.	3-15/16 in.
PROCC-WINCH4	Low Profile / Weld On	7-11/16 in.	4-7/8 in.	4-21/64 in.	3-15/16 in.
PROCC-WINCH5	Standard / Weld On	7-21/32 in.	4-7/8 in.	5-33/64 in.	3-35/64 in.
PROCC-WINCH6	Standard Portable	7-3/4 in.	4-7/8 in.	5-1/2 in.	3-1/2 in.
PROCC-WINCH7	Low Profile Portable	7-3/4 in.	4-7/8 in.	4-3/8 in.	4 in.



(PROCC-WINCH1)



(PROCC-WINCH2)



(PROCC-WINCH3)



(PROCC-WINCH4)




(PROCC-WINCH5)

Pro-Par

Winch Tracks

BBTP7160-0137-004



Material: Aluminum

Size	Material	
1.69 in. x 4.65 in.	Steel	KIN3606
1.85 in. x 4.93 in.	Aluminum	KIN3607



Kinedyne

Length: 6 ft.
Compatible Winches: 3820 & 5820

Double "L"
KIN3608



Material: Aluminum
Size: 10 ft. x 1 in. x 3 in.
Compatible Winch: 1020

Kinedyne

Length	
45-37/64 ft.	TSCPZC-191
50-37/64 ft.	TSCPZC-192



Transcraft

Material: Aluminum

More Information

www.MyAuroraPlus.com

Need more information on a particular trailer? Log into www.MyAuroraPlus.com for Aurora's Graphical Bill of Material (GBOM). Easily point and click through visual elements of a trailer to drill down to an individual trailer component.

CRG

Straps & Winches



Winch Bars

	Coating	Type	Length	Additional
KIN37030	Painted Black	Standard Bar	35 in.	
KIN37031	Chrome Plated	Standard Bar	35 in.	
KIN10032	Painted Black	Combination Bar, Box Type End	39-1/2 in.	Chain Binder Tightener
KIN37033	Chrome Plated	Combination Bar, Wide Mouth	32 in.	Chain Binder Tightener
KIN10033	Chrome Plated	Combination Bar, Box Type End	39-1/2 in.	Chain Binder Tightener



Knurled non-slip handle & a tapered, carbon-steel nose piece for strength & easy operation.

Kinedyne

	Coating	Type	Length
CRG-WB2	Painted Black	Standard Bar	35 in.



CRG

Straps & Winches

GROUNDBREAKING TARP SYSTEMS

and accessories

WE ARE THE GLOBAL LEADER IN THE MANUFACTURING OF TARP SYSTEMS AND TRAILER ACCESSORIES

At Aero, we take pride in the research and development of each of our products. Our mission is to provide you with the most efficient and effective solutions, no matter your application.

AeroBox

AeroForce F2B
front-to-back

AeroForce S2S
side-to-side

AERO


aeroindustries.com
888.535.9545



Tank Parts

Gaskets

	Type	Inner Diameter	Additional
EVR30GSKBU	Buna	3 in.	
FRUTKA9699	Envelope	30 in.	For Aerator Pad
FRUTKA9700	Envelope	19-5/8 in.	Pad
FRUTKA9889	Envelope	19 in.	For Aerator Pad
FRUVKA1650	Square Cork-Buna	3 in.	4 hole
FRUVKA5927	Dome Lid	20 in.	Pre-1993 Fruehauf
FRUVKA9234	Neoprene	19 in.	Outer Diameter 19-5/8 in.
KNA3395	Buna		



(FRUTKA9700)

Pressure Gauge

	Dial	Fill	PSI
BUYHPGS100	2-1/2	Silicone	
FRUTKA5593	2-1/2	Liquid	60
FRUVKA9867		Liquid	0-30
FRUVKA6629		Dry	0-30
FRUVKA6750		Dry	0-30



(FRUTKA5593)



(FRUVKA6750)

Static Ball Ground FRUTKG2519-1



Washer FRUTKG2797-1



Material: Rubber
For Fender Mount

J-Bolt

Material
Cadmium Plated **FRUZKA9836**
Stainless Steel **FRUZKA9836-A**



(FRUZKA9836)

Size: 3/8 in. - 18 x 2 in.

Wear Plate FRUTKA8242-A



Material: Stainless Steel
Pre-1993 Fruehauf Manhole

CRG

Tank Parts

FRUEHAUF